

2018 Roadway Program – Johnson Avenue and Lawn Avenue Concrete Reconstruction

6:30 pm Village Hall, All Purpose Room

Please sign in at the door.

Agenda

Village Staff & Engineer Introduction

Staying Informed

Project Overview

Project Timeline

Resident Impacts

Q&A

Staying Informed

Primary location for updates on the project will be located at www.wsprings.com/roads

Instructions to sign up for e-mail or text message notifications are available (Notify Me)

Updates are released a minimum of once per week

Project Overview


Complete Concrete Reconstruction of Street

- Street will be reconstructed to 12' lanes
- New curb and gutter

Relief Sewer main will be installed on Lawn and Johnson

Spot Repair of Existing Sewer Main

Driveway Aprons will be removed and replaced w/ concrete unless asphalt requested

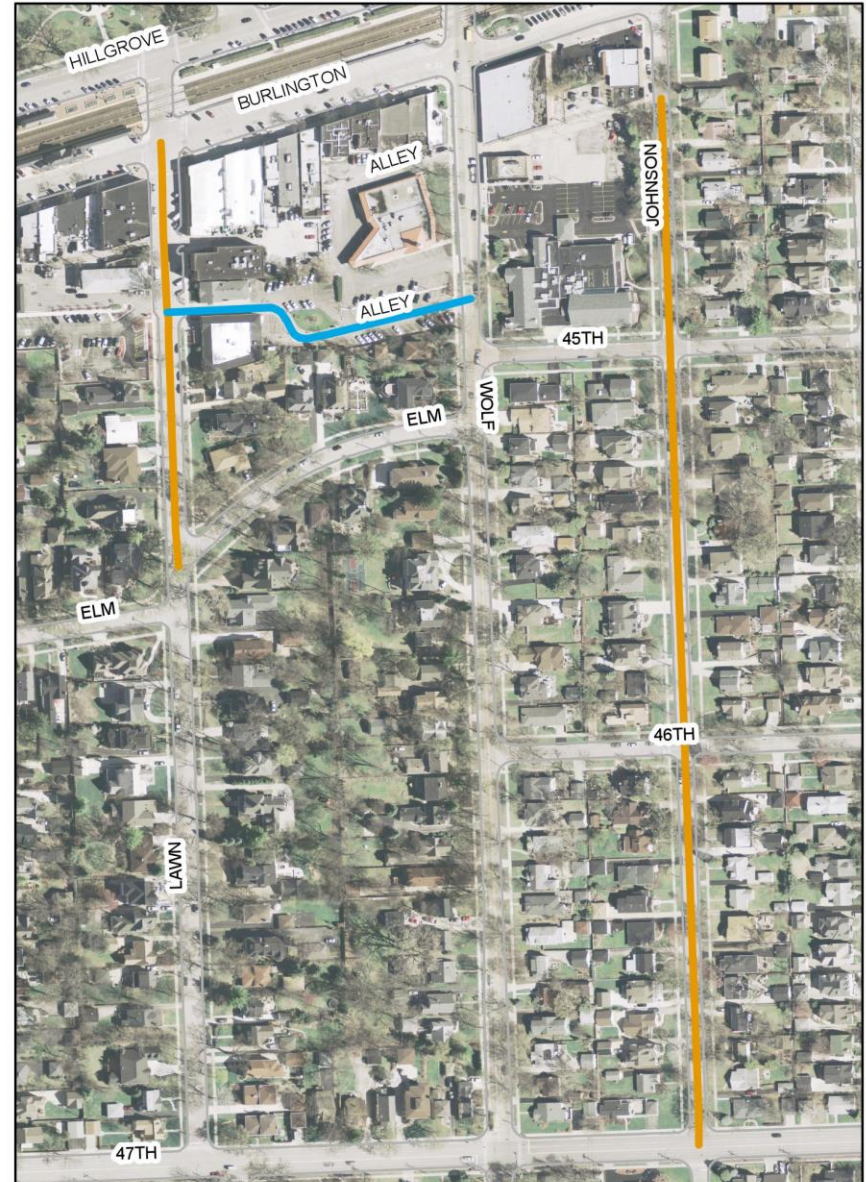

DISCLAIMER: This drawing is neither a legally recorded map nor a survey, and is not intended to be used as such. This drawing is a compilation of records, information and data located in various village, county and state offices, and other sources, affecting the land area displayed and is to be used for reference purposes only. The Village of Western Springs shall not be responsible for any inaccuracies herein contained. If discrepancies are found, please contact the Western Springs Community Development Department.



Project Timeline

Schedule is subject to change once the preconstruction meeting with contractor occurs.
Weather and unforeseen circumstances may also effect the schedule.

Stage 1: Mid July – Mid August

Relief Sewer Installation

Spot Sewer Repair

New sewer structures

Stage 2: Mid August – Mid September

Northbound lane

Driveway removals and sidewalk

Place base aggregate

New curb/gutter, driveway aprons, misc. sidewalk

New concrete pavement

Project Timeline (cont.)

Stage 3: Mid September – Mid October

Southbound lane

Driveway removals and sidewalk

Place base aggregate

New curb/gutter, driveway aprons, misc. sidewalk

New concrete pavement

Stage 4: October - November

Restoration

Topsoil

Sod

Resident Impacts

Driveway Aprons

Will be replaced with standard concrete
Village Code 8-2-8

Sprinkler Systems

Please have your contractor mark them prior to beginning of construction

Carriage Walks, Driveway Aprons & Special Materials

Village Code 8-2-9

Construction Hours

Weekday: 7:30 am – 7:00 pm

Saturday: 10:00 am – 6:00 pm

One week notice required from contractor

No Work allowed on Sundays

Resident Impacts (cont.)

Construction Equipment Storage

Street and Parkway

Will be taped off with barricades and caution tape

Road Access

Local traffic access when possible

North bound, one-way open at night after construction

Does not guarantee access to driveways

Emergency vehicle access maintained as much as possible

Parking Considerations

No Driveway access for much of the project

On street night parking allowed when possible

Side street parking will be required for residents

Johnson

45th Street

46th Street

Franklin Avenue

Lawn

Elm Street

Lawn Avenue (south of Elm)

Overnight restrictions will be waived

Limited temporary handicapped spots will be placed

Cannot guarantee access to handicapped spots

Parking Considerations (cont.)

Golf Cart transport

Operates during Village Business Hours

8 am – 4pm Monday – Friday

Call at least 60 minutes advance if need

Not on site waiting for calls

Hold harmless agreement required

Question & Answers